

: 50039447

ODSL 30V-30MS12




.....



30	
/	
2 IEC/EN 60825-1:2014	
[]	6nm[10,000nm]
20... 30,000nm	
6... 90%	0... 30,000nm
90%	0... 30,000nm
01nm	
1.0nm	
2% +/- /1% +/-	
25m	
1% +/- /1% +/-	
5... 30m	
(3)	2nm
0... 05nmK	
100x100mm ²	
U _B 18... 30V, DC	
0... 15% U _B	
1	
1	1 2
2	1 5
2	
1	




1	
1, 6	
2	
1, 7	
(U _B -2)	
1	
1, 4	
30... 100ms	
1,000ms	
1	
1	
M12	
8	
A-	
x x	79mmx69mmx150mm
650g	
LC	
LED	
LC	
0... 45°C	
-40... 70°C	
IP 67	
II	
cUL US	
IEC 60947-5-2	


	90818020
ECLASS 51.4	27270801
ECLASS 80	27270801
ECLASS 90	27270801
ECLASS 100	27270801
ECLASS 11.0	27270801
ECLASS 120	27270916
ECLASS 130	27270916
ETIV50	E0001825
ETIV60	E0001825
ETIV7.0	E0001825
ETIV80	E0001825

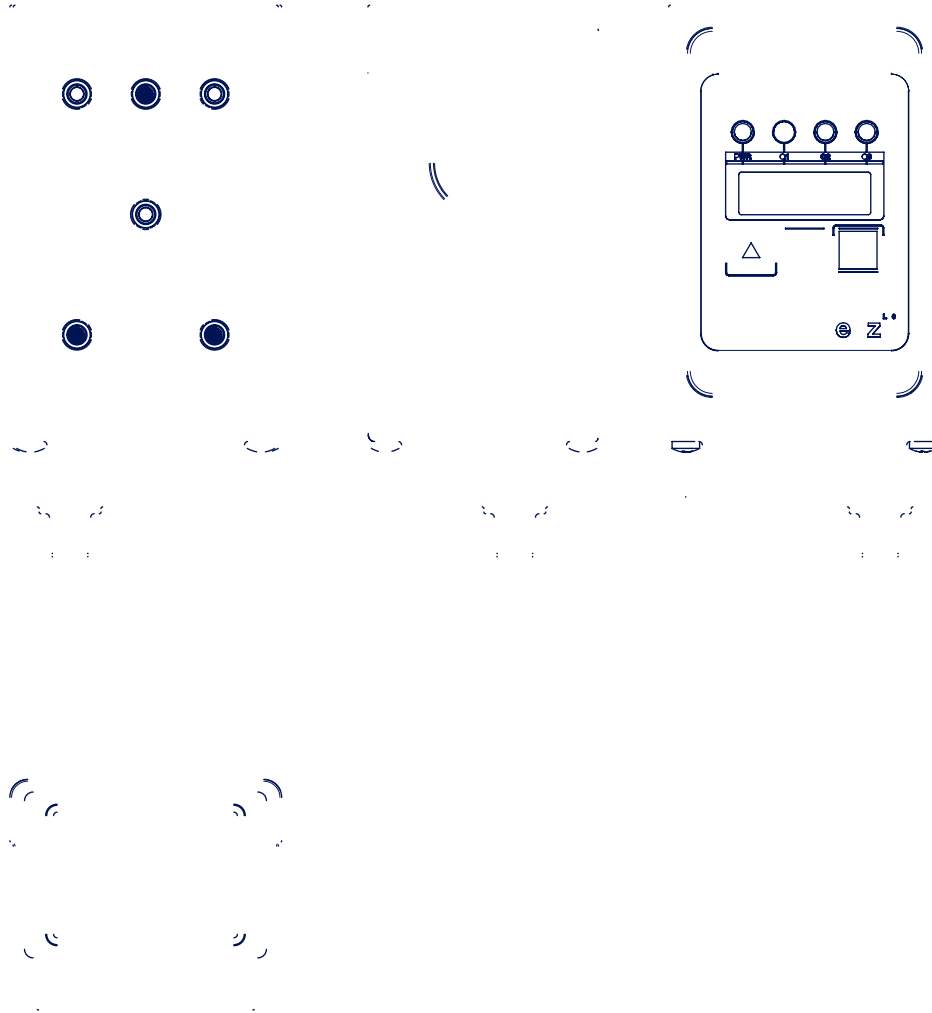



1	18... 30V DC +
2	/
3	GND
4	Q1
5	Q1
6	4... 20mA
7	1... 10V
8	AGND

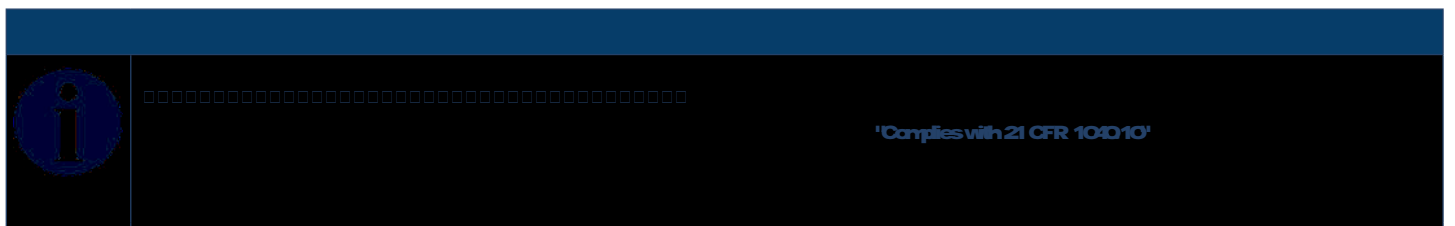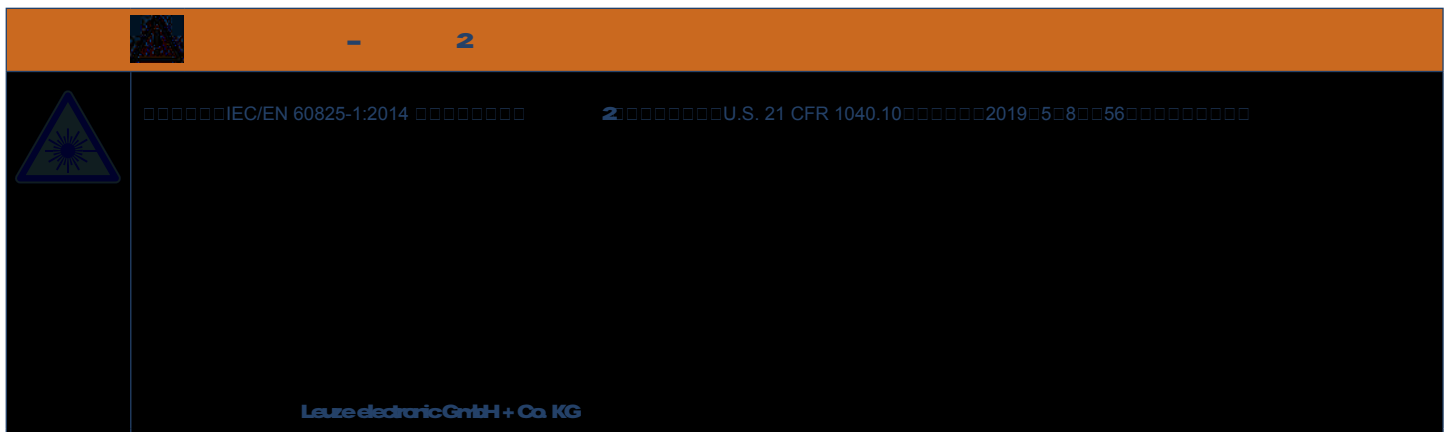



50135128 KDS-M128AP1-030

1: , M12 , , A , 8
, LED:
2 :
: 5000mm
: PUR

